


US3000

Double or single leaf swing door

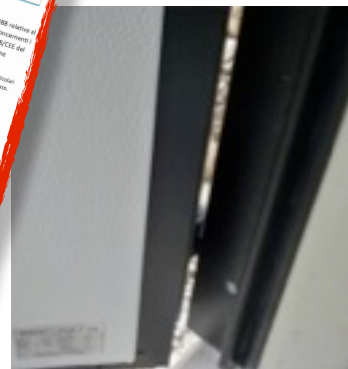

Exclusive advantages

Certified in accordance with the standard product EN 14351-1 "PANIC DOOR FOR ESCAPE ROUTES"

- Polystyrene insulation**
- Aluminium hinges against unscrewing**
- Pre-painted galvanized steel metalsheet**
- Integrated drip**




Single or double leaf swing door particularly suitable for rooms facing outwards. Perimetral frame to be anchored. Leaf made of the same panels used for the folding and sliding doors with pre-painted galvanized steel metalsheet. For the installation of the door it is not necessary to pre-wall sub-frames but it is required that the perimetral wall is suitable to expansion anchors and plugs. Leaf frame made of black aluminium profile. Standard locking with handle with lock. Drip integrated in the perimetral frame of the door; possibility to have the lower threshold; the door panel leaves about 6mm of free space above the floor. It is possible to feat the door with panic exit safety devices , windows, grills etc.

Technical Specifications

- 52mm total panel thickness with perimetral aluminium profile painted black
- Coupling of the steel sheet with the interior insulation and the frame obtained without the aid of mechanical and thermal welding but through the hot gluing; the total encapsulation of the steel sheet to the inner frame allows to obtain the best results to the bending resistance of the panel.
- Internal insulation panel made of calibrated polystyrene of approx 35 Kg/mc of density.
- Anti-aging Epdm rubber seals inside the perimetral profiles of the leaf
- Standard lock with internal and external handle made of steel covered in pvc with side lock (as option it is possible to order a panic safety exit device to be installed at site)
- Black aluminium hinges fixed with proper threaded inserts with unscrewing device
- In case of double leaf door the secondary leaf is blocked in closing position with two aluminium locks installed at sight on the leaf itself.
- Standard colour of panels white-gray type RAL 9002. Optional but always available in stock: Silver
- On the upper side of the perimetral frame it is installed a drip in black steel. Moreover three black pvc angles profiles are supplied to seal the air between the perimetral frame and the wall
- Possibility to have the lower threshold (depending on the room structure) ; the door panel is raised above the floor of about 6 mm
- Bottom frame, with standard profile to bolt to the floor, the door remains with a clearance of 6 mm. (Raised by industrial floor). A request can be expected to lower profile aluminum hinged on the floor (the shape of the compartment must allow).

Dimensions and Specifications

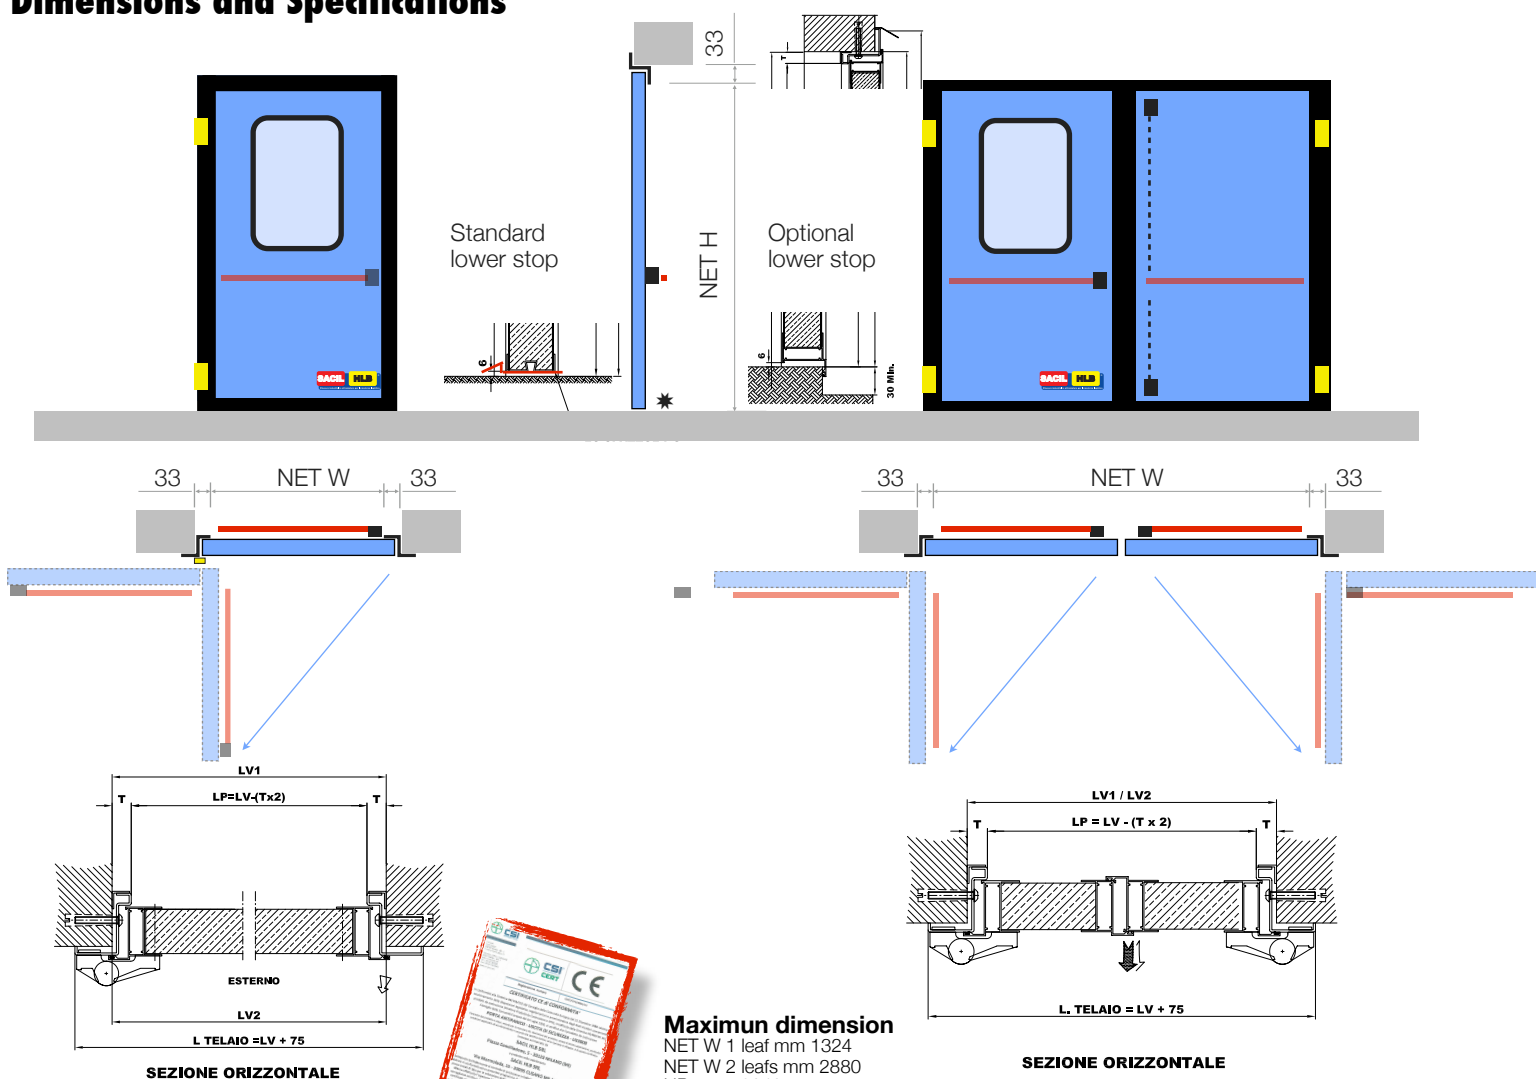

Uni en 14351-1 "PANIC DOOR FOR ESCAPE ROUTES"



SACIL - HLB
Via Marmolada 12 - Cusano M.no - Italy
Tel. 02-66402507 - Fax. 02 66401649
P.I. 05017200154 - cap soc. 100.000 i.v.

Always with us: follow us on major social Networks



web : www.sacil-hlb.it mail : info@sacil-hlb.it

A lot of solutions for your business

